




PLAN VIEW
N.T.S.

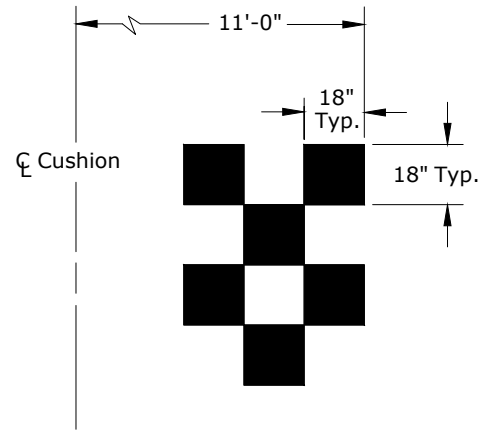

PAVEMENT MARKING DETAIL
N.T.S.

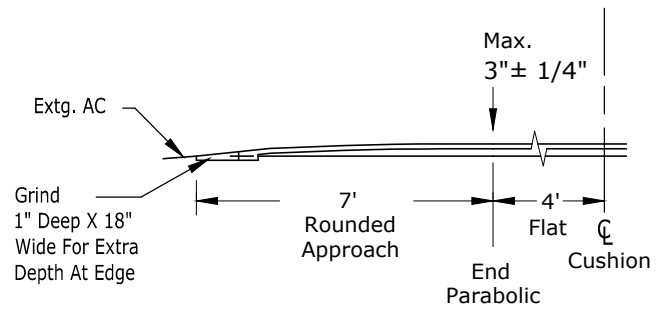

SECTION VIEW A - A
Symmetrical About ζ
N.T.S.

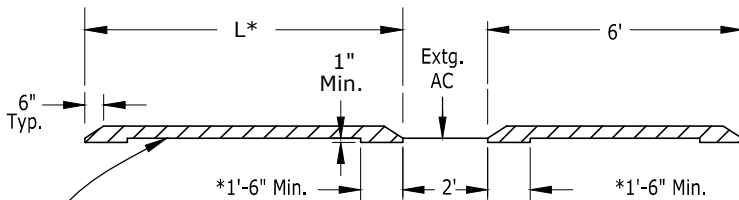

SECTION VIEW B - B
N.T.S.

Level 2 - 1/2" Dense ACP
Mixture

*Grind 1" Deep X 18" Wide For
Extra Depth At Edge

Notes:

- 1) Asphalt Shall Be Rolled For Compaction Per Specifications. Finish Edges By Applying Tackcoat & Sand Sweepings.
- 2) Signs May Be Req'd At The Direction Of The Engineer.
- 3) Cushion Shall Not Be Placed On Road Grades Greater Than 8%.
- 4) Pavement Markings Shall Be White Type B - Preformed Fused Thermoplastic Film.

* Length May Be From 7.5' To 4.5' Depending On Roadway Width.
Do Not Install If L* Is Less Than 4'

ASPHALTIC CONCRETE
SPEED CUSHION DETAILS



WASHINGTON COUNTY
DEPARTMENT OF LAND USE &
TRANSPORTATION
ENGINEERING SECTION

SPEED CUSHION
ROAD 26' WIDE OR LESS
SPEED GREATER THAN 25 M.P.H.

PLOT STAMP: 08/02/19 2:50P MACHENNAB
CAD: 6060(2).DWG

EFFECTIVE DATE: 9/01/2019

WASH. CO. # 6060