




**PLAN VIEW**  
N.T.S.

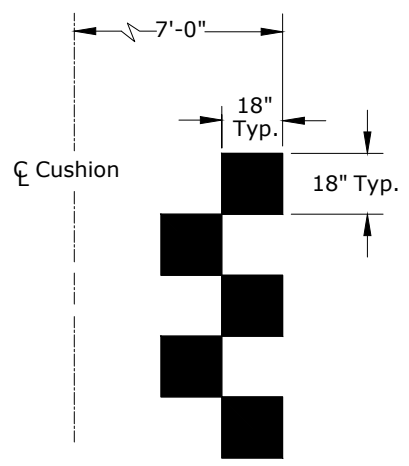

**PAVEMENT MARKING DETAIL**  
N.T.S.

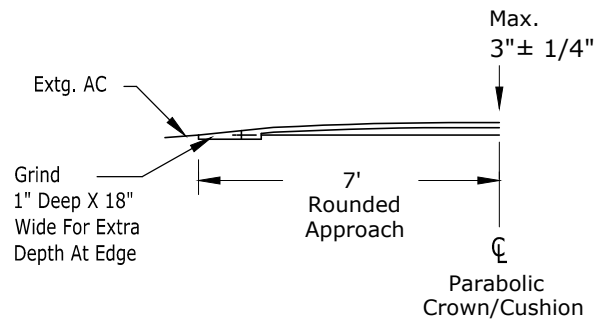

**SECTION VIEW A - A**  
Symmetrical About  $\bar{C}$   
N.T.S.

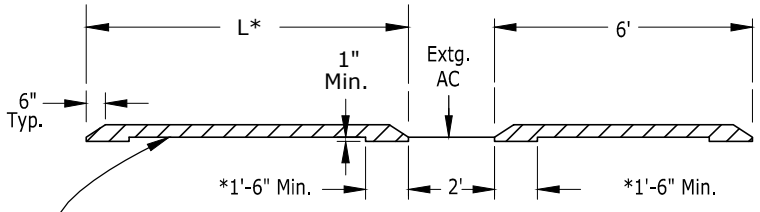


**SECTION VIEW B - B**  
N.T.S.

\* Length May Be From 7.5' To 4.5' Depending On Roadway Width.  
Do Not Install If L\* Is Less Than 4'

**Notes:**

- 1) Asphalt Shall Be Rolled For Compaction Per Specifications. Finish Edges By Applying Tackcoat & Sand Sweepings.
- 2) Signs May Be Req'd At The Direction Of The Engineer.
- 3) Cushion Shall Not Be Placed On Road Grades Greater Than 8%.
- 4) Pavement Markings Shall Be White  
Type B - Preformed Fused Thermoplastic Film.

**ASPHALTIC CONCRETE  
SPEED CUSHION DETAILS**

 <p>WASHINGTON COUNTY DEPARTMENT OF LAND USE &amp; TRANSPORTATION ENGINEERING SECTION</p>	<p><b>SPEED CUSHION ROAD WIDTH GREATER THAN 26' SPEED 25 M.P.H. OR LESS</b></p>	
	<p>PLOT STAMP: 08/08/19 4:59P ANTHONYD CAD: 6063.DWG</p>	<p>EFFECTIVE DATE: <b>9/01/2019</b></p>